

48-Fiber Trunk Cable

48-fiber single-mode, all dielectric, outdoor-rated cable


An advantage of Fiber SenSys (FSI) products is that the electronics that make up the brain of the system, the Alarm Processing Unit (APU), can be mounted inside, away from the fence line. As a result;

- All outside components are passive optical modules and cable. This allows our systems to be deployed in areas that have intrinsically safe requirements.
- EMI, RFI and lightning will not affect the field components. This allows our systems to work with no compromise in very intense environments such as airport and high voltage electrical facilities.
- Lightning striking on or around the fence will not damage the security sensor.
- Extreme temperatures that normally damage other sensors will not affect a Fiber SenSys sensor, and the most critical element, the APU is installed safely indoors.


This cable is one of the key components that allows FSI to remote-mount the APUs.

The robust 48-Fiber Trunk Cable provides a cable that can be used for insensitive lead and data communications. Spare fibers not used as insensitive sensor leads can be used for carrying data and video communications for any single-mode compatible equipment.

This 48-Fiber Trunk Cable is an all-dielectric gel-free cable designed for outdoor use. The cable is fully water blocked to ensure long life in wet environments. Its loose tube design results in a cable that can handle robust environments and provides easy mid-span access.

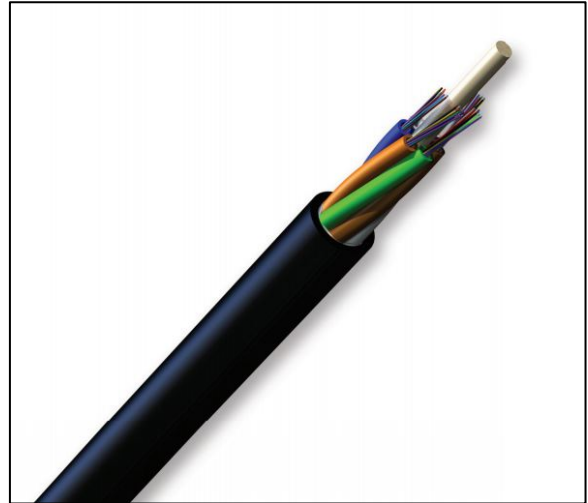

Fiber SenSys Part Number 600-53426

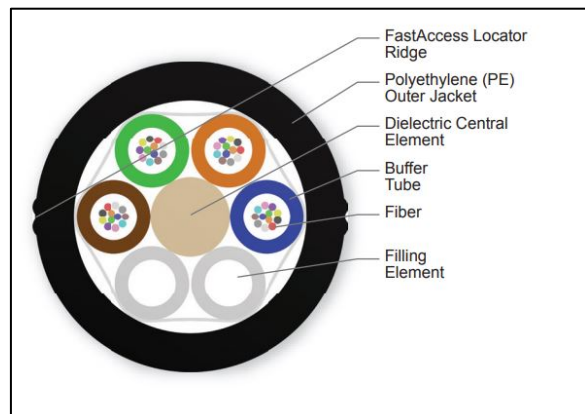

For more information, contact us at
info@fibersensys.com
Tel: +1(503) 692-4430
Toll free (US) +1(800) 641-8150
www.fibersensys.com

GENERAL SPECIFICATIONS	
Environment	Outdoor
Cable Type	Loose Tube
Product Type	Dielectric
Fiber Category	Single-mode (OS2)

TEMPERATURE RANGE	
Storage	-40 °C to 70 °C (-40 °F to 158 °F)
Installation	-30 °C to 70 °C (-22 °F to 158 °F)
Operation	-40 °C to 70 °C (-40 °F to 158 °F)

CABLE DESIGN	
Central Element	Dielectric
Fiber Count	48
Fiber Coloring	Blue, Orange, Green, Brown, Slate, White. Red, Black, Yellow, Violet, Rose, Aqua
Fibers per Tube	12
Number of Tube Positions	6
Number of Active Tubes	4
Buffer Tube Color Coding	Blue, Orange, Green, Brown
Buffer Tube Diameter	2.5 mm (0.1 in)
Number of Filling Elements	2
Tape	Water-swellable
Outer Jacket Material	Polyethylene (PE)
Outer Jacket Color	Black
Max. Fibers per Tube	12

MECHANICAL CHARACTERISTICS CABLE	
Max. Tensile Strengths, Short-Term	2700 N (600 lbf)
Max. Tensile Strengths, Long-Term	890 N (200 lbf)
Weight	65.1 kg/km (43.7 lb/1000 ft)
Nominal Outer Diameter	10.2 mm (0.40 in)
Minimum Bend Radius Installation	153 mm (6.02 in)
Minimum Radius Operation	102 mm (4.01 in)



For more information, contact us at
info@fibersenssys.com
 Tel: +1(503) 692-4430
 Toll free (US) +1(800) 641-8150
www.fibersenssys.com



